




- DEMOLITION KEY NOTES:**
- 01 EXISTING GYPSUM BOARD WALL TO BE DEMOLISHED.
 - 02 EXISTING GYPSUM BOARD WALL PARTIAL TO BE DEMOLISHED FOR NEW DOOR OPENING. SEE SCHEDULE FOR DOOR SIZE.
 - 03 DOOR AND DOOR FRAME TO BE DEMOLISHED.
 - 04 EXISTING DOOR AND DOOR FRAME TO BE SALVAGED AND REINSTALLED AT NEW LOCATIONS. SEE DOOR SCHEDULE.
 - 05 EXISTING DOOR AND DOOR FRAME TO REMAIN.
 - 06 EXISTING STOREFRONT TO BE DEMOLISHED.
 - 07 EXISTING PLUMBING FIXTURES TO BE DEMOLISHED.
 - 08 EXISTING FLOOR FINISH TO BE DEMOLISHED.
 - 09 EXISTING CEILING TO BE DEMOLISHED.
 - 10 EXIST. STOREFRONT TO REMAIN.
 - 11 COLUMNS COVER TO REMAIN.
 - 12 EXISTING CUBICLES TO BE DEMOLISHED.

- LEGEND**
- EXISTING WALL TO REMAIN
 - - - - - ITEM TO BE DEMOLISHED
 - /// NOT IN CONTRACT
 - SCOPE OF WORK
 - ⊗ CEILING TILES, LIGHT FIXTURE, EQUIPMENT TO BE DEMOLISHED

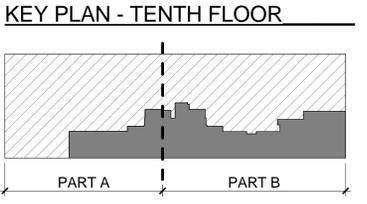

1 TENTH FLOOR DEMOLITION RCP B
1/8" = 1'-0"

ARCHITECT LBA LANCE BAILEY & ASSOCIATES 7961 EASTERN AVENUE SILVER SPRING, MD 20910 T: 301-565-2283, F: 301-565-2287	MEP ENGINEER GES GLOBAL ENGINEERING SOLUTIONS. 1355 PICCARD DRIVE, SUITE 260 ROCKVILLE, MD 20850 TEL: (301) 216-2871, FAX: (301) 216-9671	SUBMISSION SCHEDULE NO DESCRIPTION OCTOBER 15, 2012	PROJECT DHCF INTERIOR DESIGN 441 4TH STREET, NW WASHINGTON, DC 20001	SHEET TITLE: TENTH FLOOR DEMOLITION RCP PART B	SHEET NO.:
--	---	---	--	--	------------

SCALE: AS NOTED

AD-154

1/17/2013 6:05:42 PM